3 to 4 tonne Delta muscle!*



POWER STEERING AND EXHAUST BRAKES

Daihatsu.


DAIHATSU

Power. Performance. Strength. Reliability. That's mighty Delta all over!





- POWER-PACKED 3.7 LITRE DIESEL
  4 cylinder, 4 cycle overhead valve, direct injection diesel!
- POWER STEERING
  Power assist decreases with engine speed to maintain road feel!
- EXHAUST BRAKE
  Cuts in automatically when the accelerator is released!
- CONVENIENT BENDABLE LEVER TYPE HAND BRAKE
- HEAVY DUTY CONSTRUCTION
  Box type chassis, tubular cross members!
- TELESCOPIC & TILT STEERING
  Gives optimum driving comfort!
- SLIDE & RECLINE DRIVER'S SEAT
  Designed to minimise fatigue – cloth trim, lumbar and thigh supports!
- DEEP LOW-VIEW ONE-WAY LOOKOUT WINDOWS in the doors for greater all-round visibility and safety!
- ROOMY 3-PERSON DELUXE CABIN
- TRI-DIRECTIONAL ROOF VENTILATOR ON WIDE CAB MODELS
- LOADS OF CABIN STORAGE SPACE
- 5-SPEED OVERDRIVE TRANSMISSION
- TIGHT 6.5 METRE TURNING RADIUS
- EASY-READ DASH
  Centralised warning system, large speedometer with odometer. And tachometer is standard!
- FINGERTIP CONTROLS
  Lights, wipers, indicators!
- BI-LEVEL VENTILATION
- HEAVY DUTY VINYL FLOOR COVERING

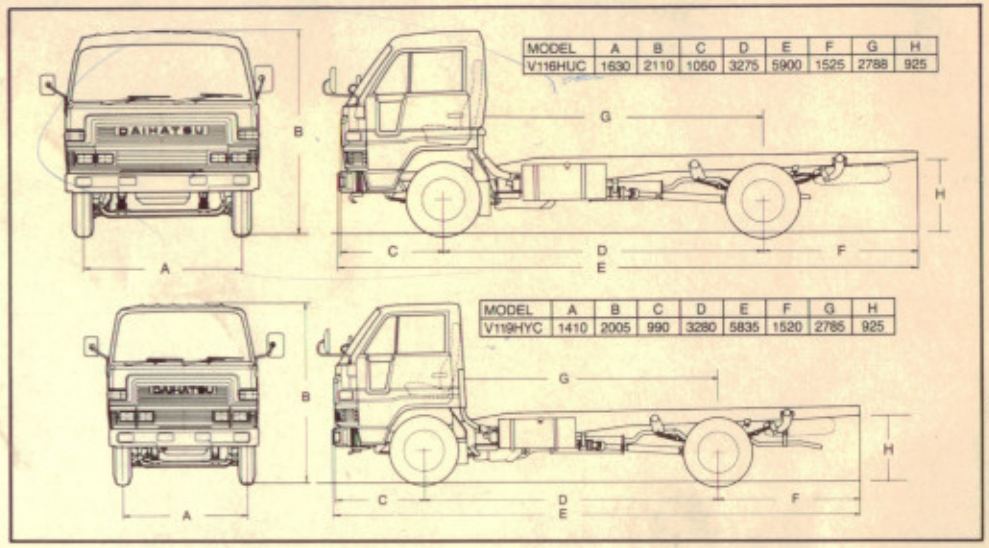

MODEL	A	B	C	D	E	F	G	H
V116HUC	1630	2110	1050	3275	5900	1525	2788	925
V119HYC	1410	2005	990	3280	5835	1520	2785	925

MODEL / SPECIFICATIONS	V116HUC	V119HYC
Gross vehicle weight	6000kg	5500kg
Wheelbase	3275mm	3280mm
Engine	Water cooled, 4 cylinder, 4 cycle, OHV Direct Injection Diesel engine.	
Bore & Stroke	102mm x 112mm	
Total displacement	3660cc	
Max. output	71 kW @ 3400 r.p.m.	
Max. torque	247Nm @ 2000 r.p.m.	
Clutch	Dry Single Disc Diaphragm Hydraulic Operation	
Transmission Gear Ratio	1st. 5.339, 2nd. 2.793, 3rd. 1.593, 4th. 1.00, 5th. 0.789, R.5.339	
Tyres: Front	700 x 16 x 10PR	
Rear	700 x 16 x 10PR (DUAL)	
Suspension:	Semi-Oval Spring Leaves with Double Acting Telescopic Shock Absorbers.	
Main brakes	Front: Drum 2 Leading Type. Rear: Dual Drum 2 Leading Type.	
Parking brake	External Expansion Type (Propellor Shaft Control).	
Track: Front	1630mm	1410mm
Rear	1470mm	
Min. road clearance	200mm	190mm
Seating capacity	3	
Min. turning radius	6.5m	6.5m
Fuel tank capacity	100 litres	
Tare weight	1900kg	1765kg
Cab to axle measurement	2789mm	2785mm
Overall length	5950mm	5885mm
Overall width	1995mm	1695mm
Overall height	2110mm	1995mm
Compression Ratio	17.9	
Steering Type	Power Assisted Recirculating Ball	
Differential Ratio	5.857	5.571
Electrical	12 Volt	
Tachometer	Standard	

Some equipment illustrated may not be available in Australia.
Please check with your dealer for standard and optional equipment.
DAIHATSU reserves the right to make changes at any time, without notice, in prices, colours, material, equipment specifications and models, and also to discontinue models.

DAIHATSU

And parts and service from a network of around 250 authorised dealers and service centres, Australia-wide!

DAIHATSU AUSTRALIA PTY LTD

Sydney	(02) 534 4999	Adelaide	(08) 332 3177
Brisbane	(07) 257 1699	Perth	(09) 362 3977
Melbourne	(03) 417 7100		

DHU 509G 2-90 5M